



 **JANKÓ**  
**ABLAK**

The safe solution



## Introduction

Jankó Kft. started its activity in 1987 as one-man enterprise. A few years later we bought and remodelled the company premises and began operating as a family business producing doors and windows and continued to work in Limited Liability Company format.

Our company became the region's most-widely respected enterprise with the highest production capacity and we have been equipped with the most modern machinery in the field of wooden industry.


Using "simple" technology at the early stages we have arrived at using the most professional C.N.C. machinery these days. We guarantee permanent quality and production level with Weinig Group's computer controlled object machinery and processing centers. Our computerised system does not only design but control. Due to our skilled professionals' work, we always provide the highest quality.

Our company offers full range of services, from expediting raw material, through glazing, till delivering and building in the product.

We mainly merchandise in Hungary, but our finished products can be found in numerous European countries, for example, in Germany and in Croatia.

We hope you could be welcomed among our satisfied customers in the near future.


Sincerely,

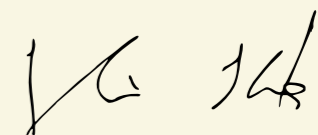

Károly Jankó

## Away from noise of the bustling city

The Standard 68 mm wooden door product group is the product category we sell in wide circle. Besides its low price it is featured by excellent design, high-quality and safety. After a long and an exhaustive day our product group can assure perfect relaxation. Close off the regular days' noises; make your home a perfect relaxing place!

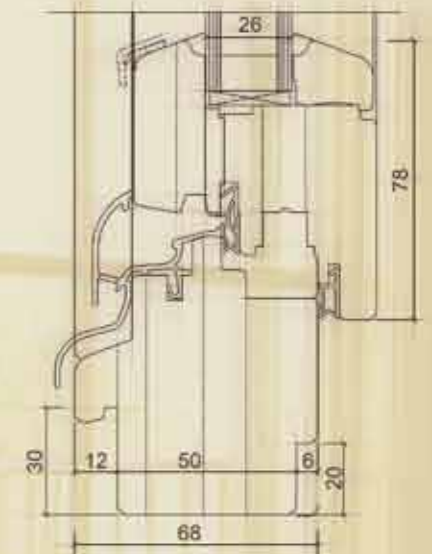

**Values:**

Ug= 1,1 W/m2K  
Uw= 1,6 W/m2K  
Rw= 32 dB (-1;5)

**Technical parameters:**

Two-ply cover with 26 mm thickness heat-insulating glass structure.

**Tailor made modification values:**

- temperature
- voice
- security

**Shielding technical systems:**

- shutter
- plywood
- insect net

**Complementary elements of the product:**

- window-sill
- splat

**Advantage:**

- aluminium leaf-wing cover and beak withstanding the test of weather
- qualitative wooden raw material
- heat isolated glazing
- maximum comfort
- multipoint closing

**Tips:**


- tailor made setting

**Option:**

- optional standard or rustic profile

## Real value in your home

Besides the essential features the Extra 78 mm type of window is attributed with unique quality in order to provide feeling of real comfort to your family. Its high-quality of acoustical and heat control and its three-ply glass structure make this product category unique. Lean back, and spend some restful hours with your family! Enjoy your home as the island of silence and tranquility!

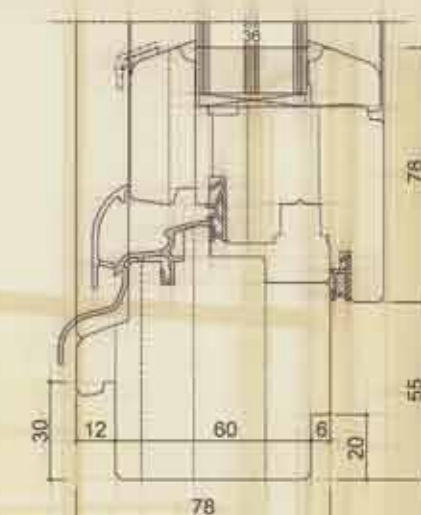

**Values:**  
U<sub>g</sub>= 0,7 W/m<sup>2</sup>K  
U<sub>w</sub>= 1,1 W/m<sup>2</sup>K  
R<sub>w</sub>= 32 dB (-1;5)

**Technical parameters:**

Three-ply cover with 36 mm thickness heat-insulating glass structure.

Tailor made modification values:

- temperature • voice
- security

Shielding technical systems:

- shutter • plywood
- insect net

Complementary elements of the product:

- window-sill • splat

**Advantage:**

- aluminium leaf-wing cover and beak withstanding the test of weather
- qualitative wooden raw material
- heat isolated glazing
- maximum comfort
- multipoint closing

**Tips:**


- tailor made setting

**Option:**

- optional standard or rustic profile

## Reality from nature

The uncrowned king of our window product group is the Premium 88 mm shut-off composition of wood and high-quality. Besides its excellent sound and heat insulation, and its high-quality, the elegant colours and forms make this product exclusive. Make your dreams come true! Create secure, safe and harmonic home for your family!

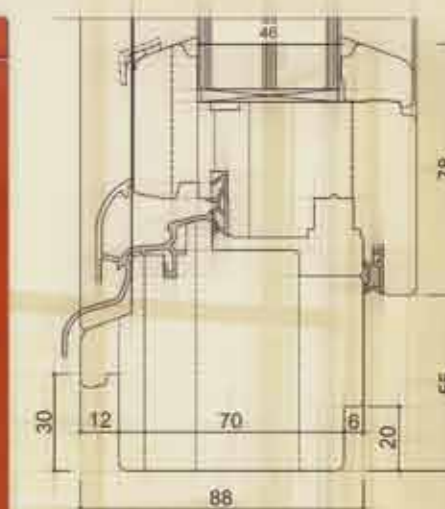

**Values:**

U<sub>g</sub>= 0,6 W/m<sup>2</sup>K  
U<sub>w</sub>= 1,0 W/m<sup>2</sup>K  
R<sub>w</sub>= 32 dB (-1;5)

**Technical parameters:**

Three-ply cover with 46 mm thickness heat-insulating glass structure.

**Tailor made modification values:**

- temperature
- voice
- security

**Shielding technical systems:**

- shutter
- plywood
- insect net

**Complementary elements of the product:**

- window-sill
- splat

**Advantage:**

- aluminium leaf-wing cover and beak withstanding the test of weather
- qualitative wooden raw material
- heat isolated glazing
- maximum comfort
- multipoint closing

**Tips:**

- tailor made setting

**Option:**

- optional standard or rustic profile


## Naturality meets versatility

The Wood - Alu types of windows combine the warmth of wood with the purity and dignity of aluminium. The wooden frame used in this product group provides your home with intimacy, while the aluminium covering sensibly protects from the harms of weather.

Enjoy your silent and tranquil home!

### Wood - Alu profiles available:

- Wood - Alu 68 mm
- Wood - Alu 78 mm
- Wood - Alu 88 mm

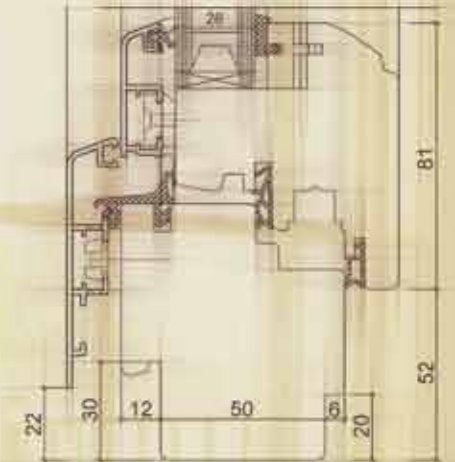

**Values: Wood - Alu 68 mm**  
Ug= 1,1 W/m2K  
Uw= 1,6 W/m2K  
Rw= 32 dB (-1;5)

### Advantage:

- quality wood materials • thermal insulation glazing
- maximum comfort • closure on multiple points
- weather-proof external aluminium frame structure
- group of ALU profiles with wood patterns - by request
- profiles without glass slats, a unique appearance and design

### Tips:

- There is airspace between the aluminium frame and the wooden structure, this ensures ventilation.

### Option:

- Reveals and wings ALU profiles in several different colours

### Technical parameters:

Double- or triple-pane 26mm, 36mm, 46 mm thick thermal insulation glazing.

### Tailor made modification values:

- temperature • voice
- security • durability


### Shading technology:

- aluminium shutters

## The harmony of tranquility and security

The triple-pane 44 mm thick glazing made of high-quality materials in our Passive Wood - Alu group of products makes you forget if it is a cold winter or a hot summer. You will always be provided the ideal temperature in your home.

Relax and enjoy the security and tranquility!

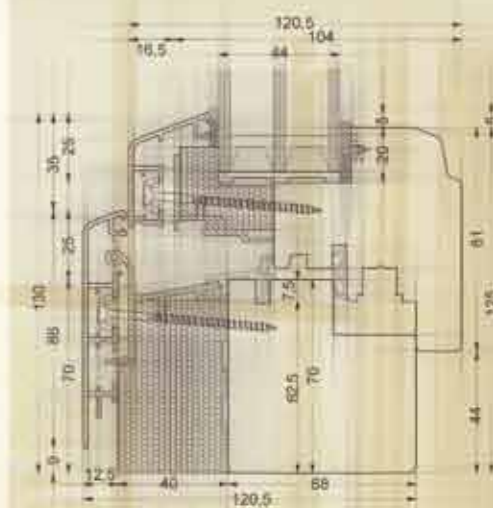

**Values:**

Ug= 0,60 W/m<sup>2</sup>K  
Uw= 0,80 W/m<sup>2</sup>K  
Rw= 32 dB (-1;5)

**Technical parameters:**

Triple-pane 44 mm thick thermal insulation glazing

**Tailor made modification values:**

- temperature • voice
- security • durability

**Shading technology:**

- aluminium shutters

**Advantage:**

- quality wood materials • thermal insulation glazing
- maximum comfort • closure on multiple points
- weather-proof external aluminium frame structure
- group of ALU profiles with wood patterns - by request
- profiles without glass slats, a unique appearance and design

**Tips:**

- There is airspace between the aluminium frame and the wooden structure, this ensures ventilation.

**Option:**

- Reveals and wings ALU profiles in several different colours

## The happiness of light

Thanks to the big glass surface our up-to-date, modern French windows perfuse your home with light. All angles of the rooms are filled up with natural energy, and charm your home into a home of sunlight. Let the sunlight in to fill up your days with happiness!

### The four main types:

- Lifting and pushing French window
- Pushing and balancing French window
- Concertina French window
- Balancing and opening French window

50 % of the lifting and pushing and the pushing and balancing French window device can be opened and 50% is fixed. The mobile wings should be pushed in front of the fix wings in a grave.

The concertina French window can be fully disconnected; the wings close on the top of each other into the internal area.

The concertina and the lifting and pushing French window are equipped with aluminium door step avoiding heat bridges.

### Optional cross-section:

- Standard 68 mm
- Extra 78 mm
- Premium 88 mm

### Tips:


- When choosing the colour of the crown, be aware of the colour of the chosen shut-off devices.

### Option:


- optional standard or rustic profile




Lifting and pushing French window

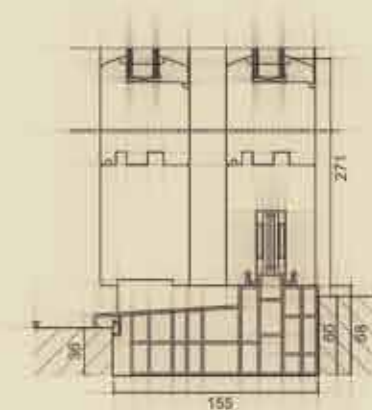

Pushing and balancing French window

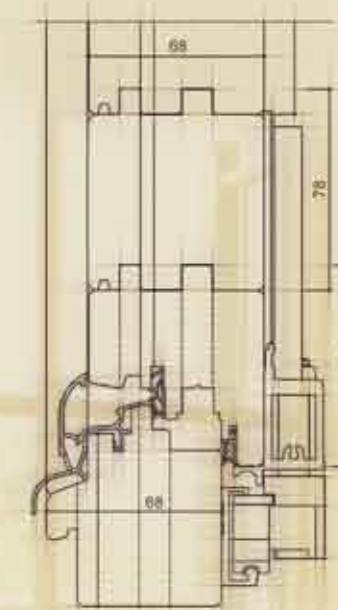



Concertina French window

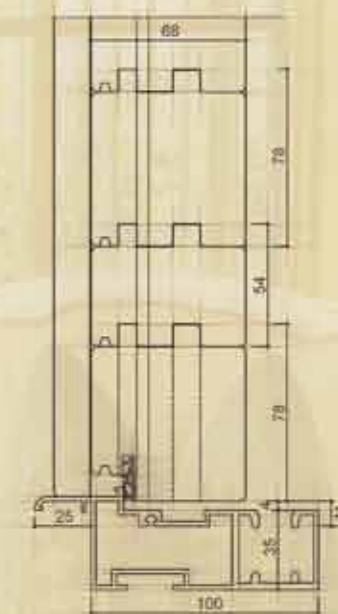

## The harmony of nature and home

Due to the qualitative wooden raw material and the heat-insulated glazing our front doors provide maximum comfort and security. Our unit products based on your ideas adjust the outer world's drift with the tranquility of your home.

Open up for nature! Choose wood for security!

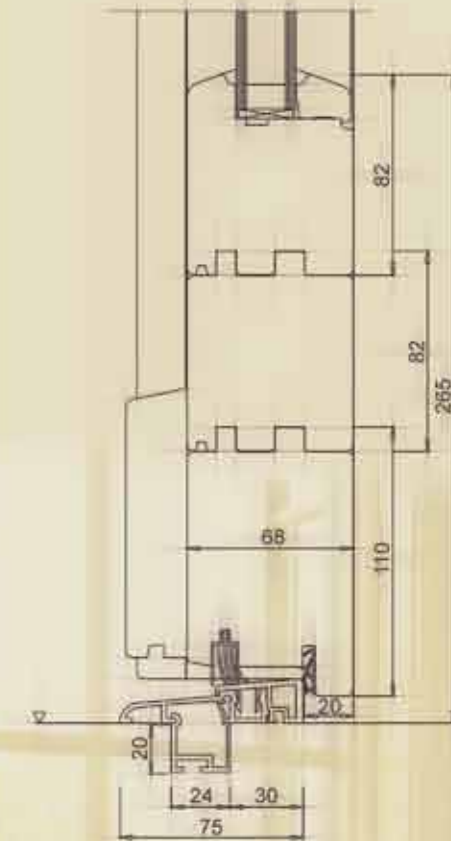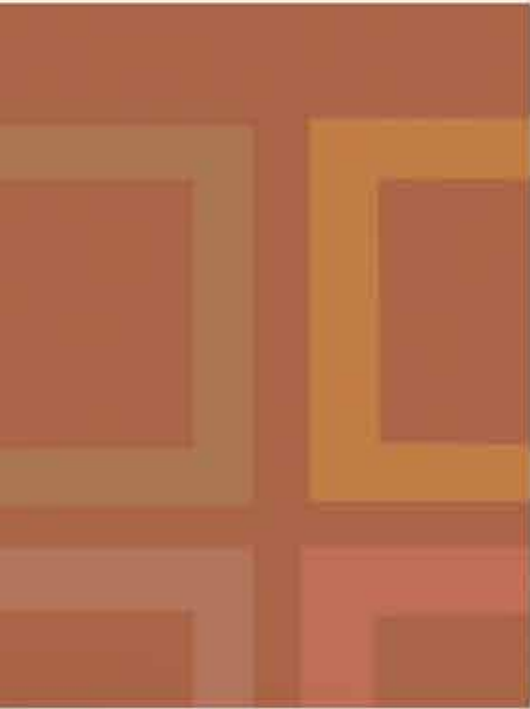

### Optional cross-section:

- Standard 68 mm
- Extra 78 mm
- Premium 88 mm

### Advantage:

- implementation of unique ideas and forms
- maximum comfort and security
- qualitative wooden raw material
- heat isolated glazing
- safe hardware

### Tips:

- the front door's form is adjustable to the style of the house

### Option:

- optional standard or rustic profile

### Technical parameters:

#### Heat-insulating glass structure

- two-ply 26 mm
- three-ply 36 mm
- three-ply 46 mm thickness

Aluminium heatless built-up door step withstanding the test of weather.

The surface treatment is water-based.

Thick transparent colour simple or double rubber seal profile.

## We provide:

- innovative, unique, tailor made products adjusted to the client's needs
- cutting edge technology
- rapid and on-time delivery
- skilled professionals
- comfortable and flexible administration
- attentive, helpful service
- mapping and proposal making combined with consultancy
- wide range of products with different pricing and quality
- various sales
- showrooms in different locations of the country





The safe solution

**Jankó Faipari és Kereskedelmi Kft.**

7900 Szigetvár, Ország út 23. Hungary

Phone: +36-73-510-177

Fax: +36-73-510-286

Mobile: +36-30-500-8938

Website: [www.jankokft.hu](http://www.jankokft.hu)

E-mail: [info@jankokft.hu](mailto:info@jankokft.hu)

**Showrooms in Hungary:**

Budapest III. San Marco u. 6-8.

Phone/Fax: +36-1-437-0102

Mobile: +36-30-427-8499

E-mail: [pest@jankokft.hu](mailto:pest@jankokft.hu)

Budapest XVIII. Üllői út 502.

Phone: +36-1-297-0322

Fax: +36-1-297-0323

Mobile: +36-30-563-6769

E-mail: [ulloi@jankokft.hu](mailto:ulloi@jankokft.hu)

We are not responsible for printing errors.